CAMBRIDGE

Model SS660-PT Series Stainless Steel Low Profile "Poly-Top" Floor Scales

Applications:

- Pharmaceutical
- Food Processing
- Batching/Filling
- Harsh Environment
- Washdown Environment
- General Purpose Weighing

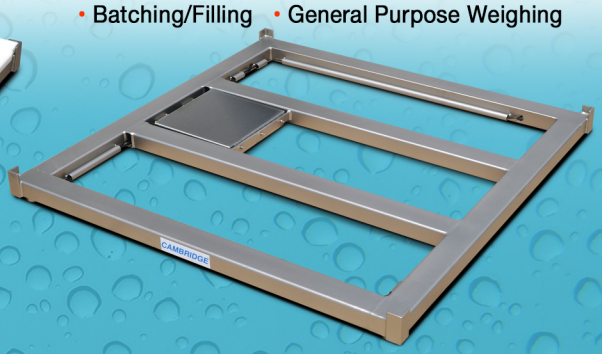

Model SS660-PT-OB features an ON-BOARD junction box

Model SS660-PT-R features a REMOTE junction box

Optional Cambridge Model SSCSW-10AT indicator.

Model SS660-PT-OB Features:

- **"ON-BOARD"** stainless steel NEMA IV, water seal rated junction box
- 1" thick USDA/FDA approved removeable polyethylene top
- Hand slots to remove "Poly-Top" for cleaning
- Stainless steel Type 304 construction
- Capped and sealed stainless steel structural tubing
- Stainless steel IP67 waterseal rated load cells
- 20 ft. shielded signal cable
- 100% end loading protection
- 200% overload & shock load protection
- Easy access leveling

Model SS660-PT-R Features:

All of the above except with-

- **"REMOTE"** stainless steel NEMA IV, water seal rated junction box and 10' Sealite flex conduit

Model SS660-PT-R shown with optional stainless steel free standing indicator column and Cambridge Model SSCSW-10AT indicator.

Approvals:

NTEP — National Conference on Weights and Measures

COC# 96-157A1

Made in USA

Members:

- The National Conference on Weights and Measures

CAMBRIDGE

Model SS660-PT Series Stainless Steel Low Profile "Poly-Top" Floor Scales

Model SS660-PT Specifications (Standard Sizes)

SIZE	CAPACITY	SHIP WEIGHT	POLY-TOP WEIGHT	SIZE	CAPACITY	SHIP WEIGHT	POLY-TOP WEIGHT
24" x 24" x 3.75"	1,000 lb.	85 lb.	20 lb.	48" x 60" x 3.75"	5,000 lb. *	335 lb.	100 lb.
	2,500 lb.	85 lb.	20 lb.		10,000 lb. *	430 lb.	100 lb.
30" x 30" x 3.75"	1,000 lb.	110 lb.	32 lb.	48" x 72" x 3.75"	5,000 lb. *	405 lb.	120 lb.
	2,500 lb.	110 lb.	32 lb.		10,000 lb. *	510 lb.	120 lb.
36" x 36" x 3.75"	1,000 lb.	160 lb.	45 lb.	60" x 60" x 3.75"	5,000 lb. *	425 lb.	125 lb.
	2,500 lb.	160 lb.	45 lb.		10,000 lb. *	530 lb.	125 lb.
	5,000 lb.	160 lb.	45 lb.	60" x 60" x 4.75"	20,000 lb. *	785 lb.	125 lb.
48" x 48" x 3.75"	1,000 lb.	210 lb.	80 lb.	60" x 84" x 4.75"	10,000 lb. *	1,050 lb.	175 lb.
	2,500 lb.	210 lb.	80 lb.		20,000 lb. *	1,275 lb.	175 lb.
	5,000 lb. *	210 lb.	80 lb.				
	10,000 lb. *	335 lb.	80 lb.				

* NTEP Approved
Custom sizes available. Consult factory

Model SS660-PT Stainless Steel Options:



Type 316 construction

Hermetically sealed and/or "FM" approved load cells



Captive ball leveling feet

Model SSCSW-10AT

Model SSCSW-20AT

Model SS660-PT Stainless Steel Accessories:



Ramp



Pit form

Bumper guard

Bumper guard surround



48" Indicator column (Free standing)

Lag down bracket (sold individually)

Portability cart

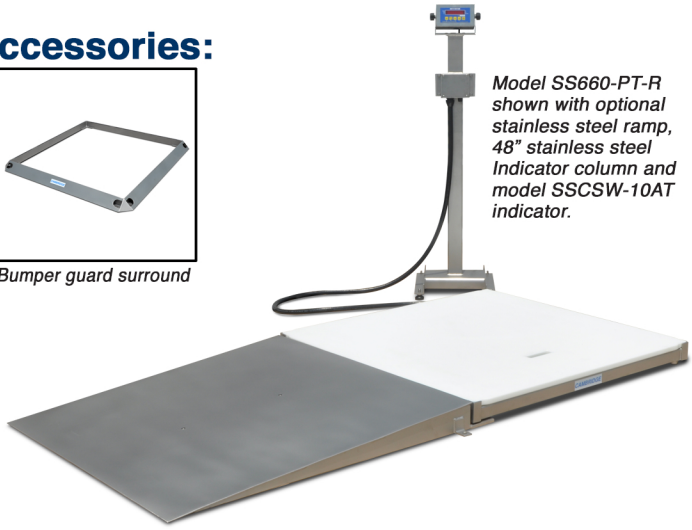

Model SS660-PT-R shown with optional stainless steel ramp, 48" stainless steel Indicator column and model SSCSW-10AT indicator.

Distributed By:

Cambridge Scale Works, Inc. will warrant this product for one full year against defects in material and/or workmanship.

Cambridge Scale Works, Inc. • P. O. Box 670 • Honey Brook, PA 19344
(800) 292-7640 • www.cambridgescale.com

© Cambridge Scale Works, Inc. 7/2014